

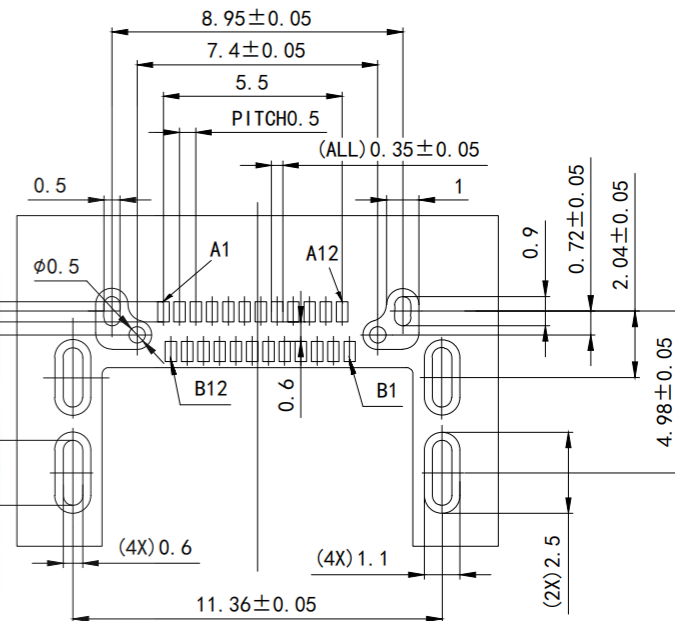
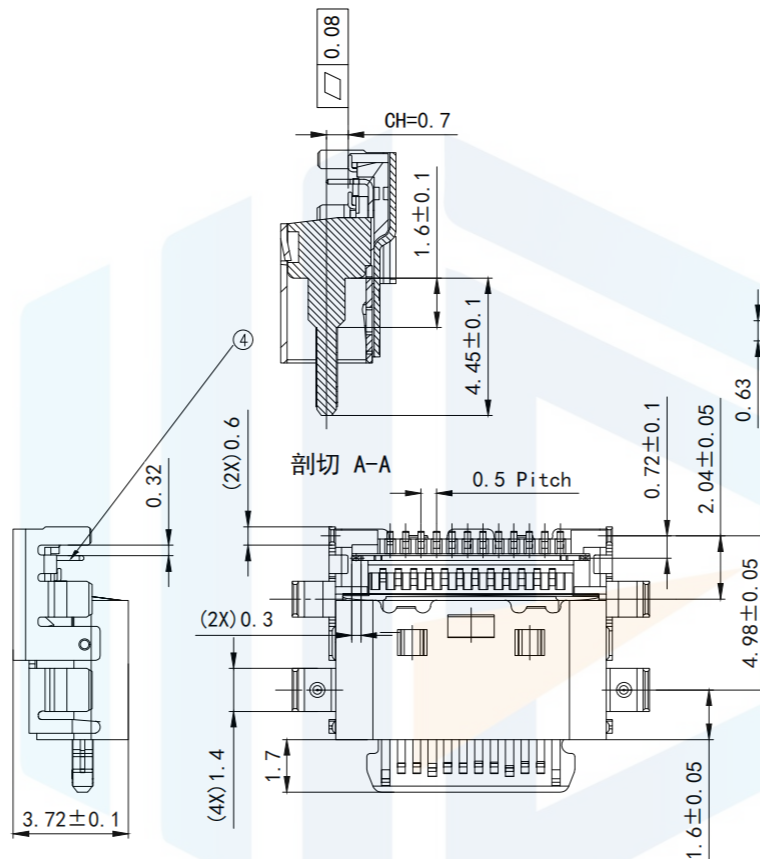
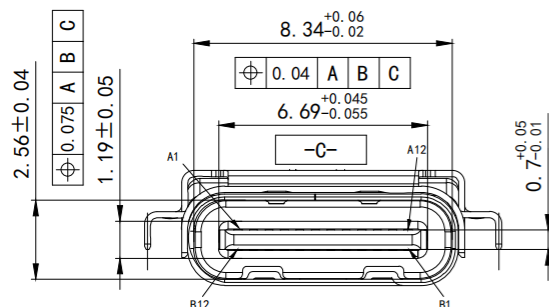
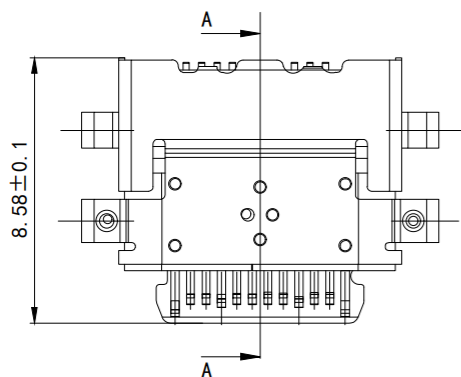


RoHS2.0
Compliant

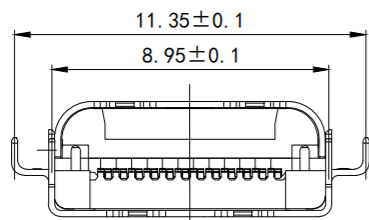

RECOMENDED PCB LAYOUT (TOL: ±0.05)

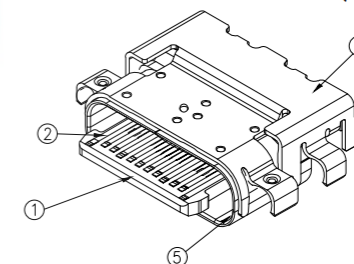


1. Electrical performance
1-1. Rated current: 3A;
1-2. Contact impedance: 40mΩ max;
1-3. IR test: 500VDC, 0.1S, 50MΩ
1-4. Hi pot test: 300VAC, 0.1S, 0.5mA

TOLERANCE

X. XXX	±0.05
X. XX	±0.15
X. X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON



东莞市恒祺电子科技有限公司

Dongguan Hengqi Electronic Technology Co., Ltd

<https://www.hq-dz.com>

phone: 15812872448

TITLE:

TYPE C 24PIN沉板CH=0.7
MI8SE舌头外露1.7

PART NO: TYPE-C24P-CB8SE

DRAWING NO: 11.35*8.58*3.72

DRAWN:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

18-10-08

18-10-08

18-10-08

UNIT:
mm

SCALE:
FULL

SIZE:
A4